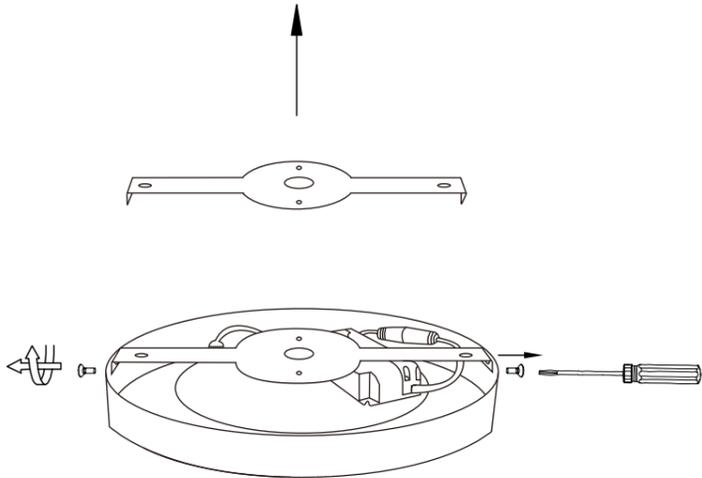


A

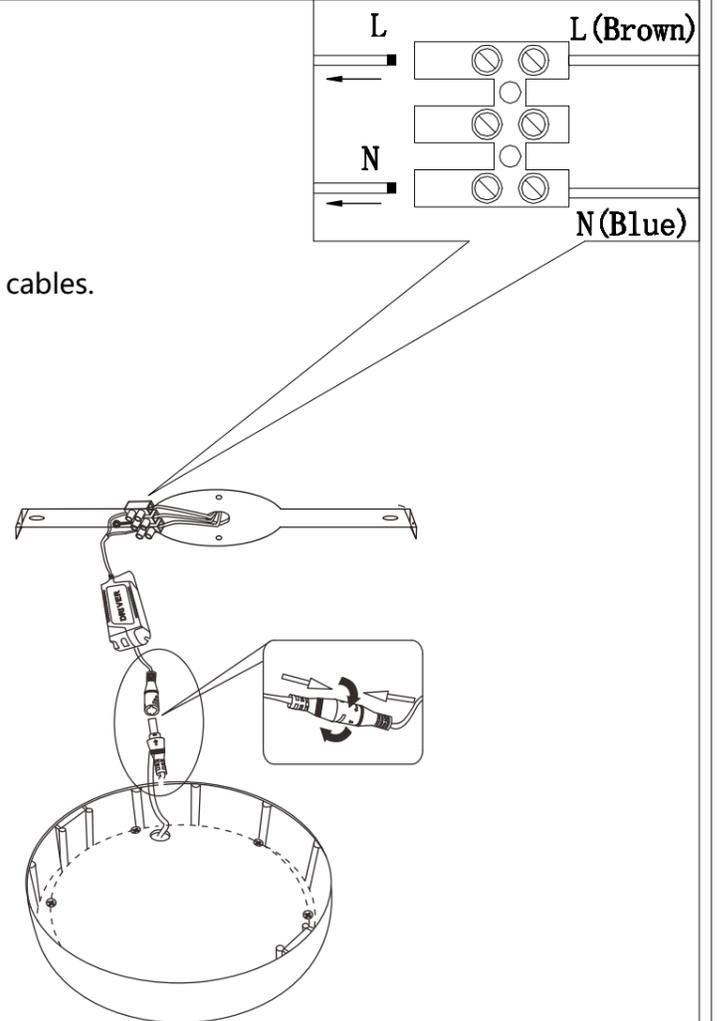
Remove the ceiling mount.

**TOOL**

screw driver

B

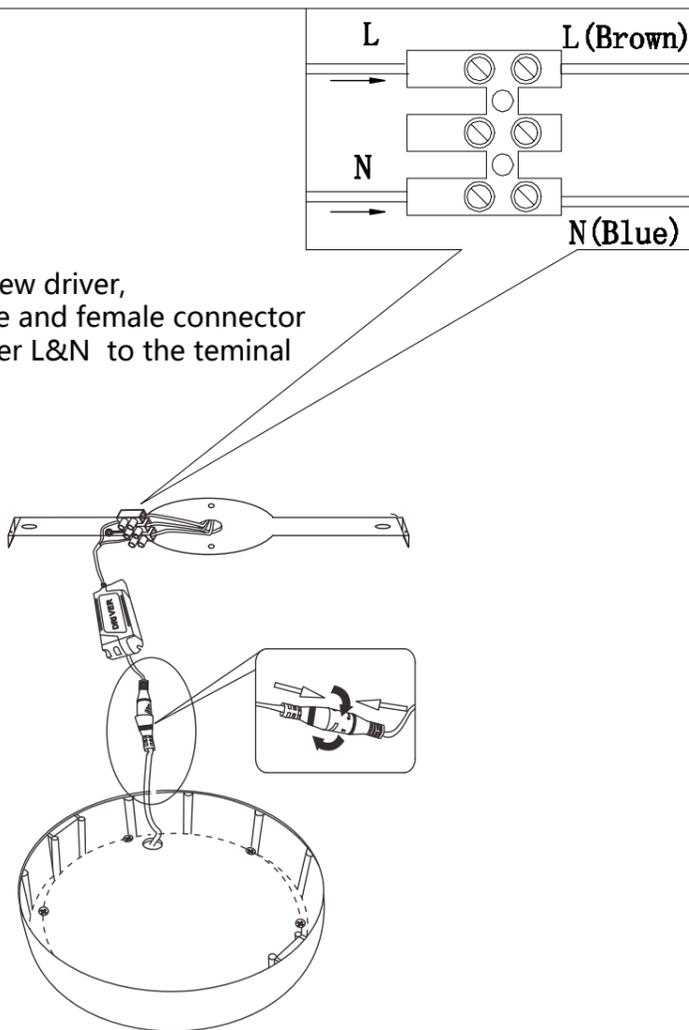
Disconnect the cables.

**TOOL**

screw driver

C

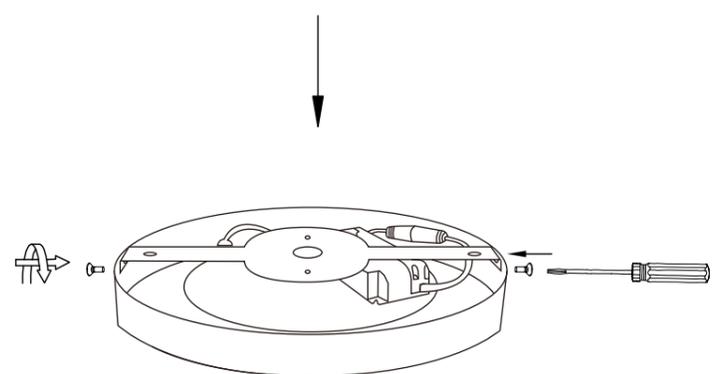
Replace with a new driver,
connect the male and female connector
connect the driver L&N to the terminal

**TOOL**

screw driver

D

install the ceiling mount

**TOOL**

screw driver