

TOUR 3418016-3418017




Loosen the 2 side end plastic screws using a tool




Take out the 2 side plastic caps and aluminium caps by hand.

06 Take out acrylic cover by hand.



The LED mould wires connect by male and female plugs. Pull out the plug, slide the LED mould out from the lamp body. Replace new LED mould with male plug and connect with female plug, then fix it on the body.

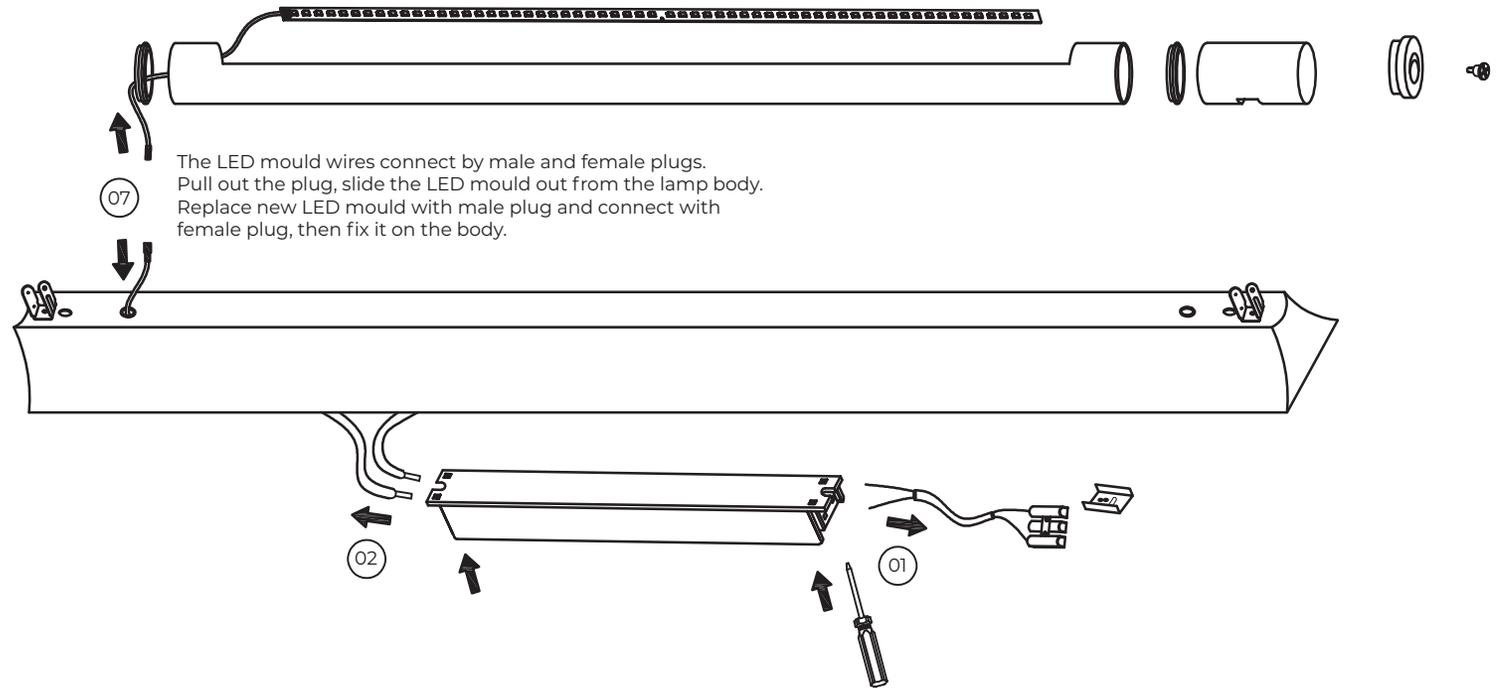

A. To replace the driver follow steps 01, 02  
Loosen the wires on both sides (blue and brown wires) using a tool. Then change the driver and re-connect the wires on both sides.

B. To replace the LED mould follow steps 03, 04, 05, 06, 07